


- The anchor expands within the cavity to securely grip the plate from behind.
- The plastic flange is tightened to fit into the hole.
- Special plastic arms can be easily bent and broken to create a fixed threaded nut in the wall.
- Installation can be completed using the included screw or any other screw of your choice.
- Available in various types suitable for all plate thicknesses.

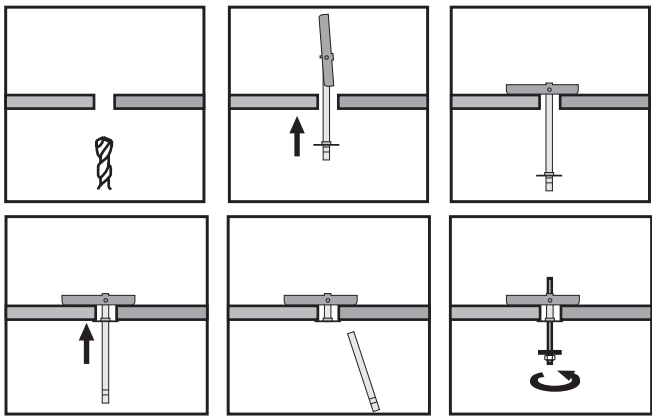

Product	Art. No.	Hole Diameter	Screw Length	Qty Per Box	Qty Per Carton
FX-MAX M4	71310	13	-	25	300
FX-MAX M5x60	71323	13	M5x60	25	300
FX-MAX M6x60	71333	13	M6x60	25	300

FX-MAX

Metal Drywall Anchors

Main Material

- Drywall
- Particle Board
- Fibre Board
- Aerated Concrete Wall and Roof

Application Field

- Mechanical Installation
- Electrical Installation
- Lamps
- Shelves
- Wardrobe
- Wall Protection Barrier

FX-MAX

Application

FX-MAX

Technical Information

Complementary Products



page 99



page 100



Chemical Anchors

Heavy Duty Anchors

General Purpose Fasteners

Frame Anchors

Aerated Concrete Anchors

Drywall Anchors

Nailing Systems

Insulation Anchors

Screws

Drill Bits

Scaffold Fasteners

Solar System Fasteners

Special Fixing

