



Chemical Anchors

Heavy Duty Anchors

General Purpose Fasteners

Frame Anchors

Aerated Concrete Anchors

Drywall Anchors

Nailing Systems

Insulation Anchors

Screws

Drill Bits

Scaffold Fasteners

Solar System Fasteners

Special Fixing



PRO-200 Plus Seismic

Hybrid Chemical Anchor

Main Material

- Concrete
- Cracked Concrete
- Natural Stone
- Hollow Brick
- Solid Brick

Application Field

- Structural Connections
- Seismic Connections
- Steel Structures
- Machines
- Facade Anchors
- Reinforcement
- Rail Systems
- Cantilevers
- Warehouse Rackings

PRO-200 Plus Seismic

Technical Information

vesta
DesignFIX

Complementary Products



page 98



page 35



page 24



page 27



page 34




- ETA Option 1 Certified – Suitable for cracked and uncracked concrete
- Seismic Certified
- Post Installed Rebar Connections Certified
- For Heavy and Medium Loads
- Usable in Short Edge Distances Due to Non-Expansion Anchoring
- Usable in Dry, Wet, and Water-Filled Holes
- Styrene Free
- Time-Efficient with Rapid Setting
- Reusable With a Replaceable Mixing Tip
- Used with Sieve for Hollow Wall Materials


Vesta PRO-200 Plus Seismic

Cartridge Temperature	T work (minutes)	T Load
-5,-1 °C	50	5 h
0,+4 °C	25	3,5 h
+5,+9 °C	15	2 h
+10,+14 °C	10	1 h
+15,+19 °C	6	40 min
+20,+29 °C	3	30 min
+30,+40 °C	2	30 min



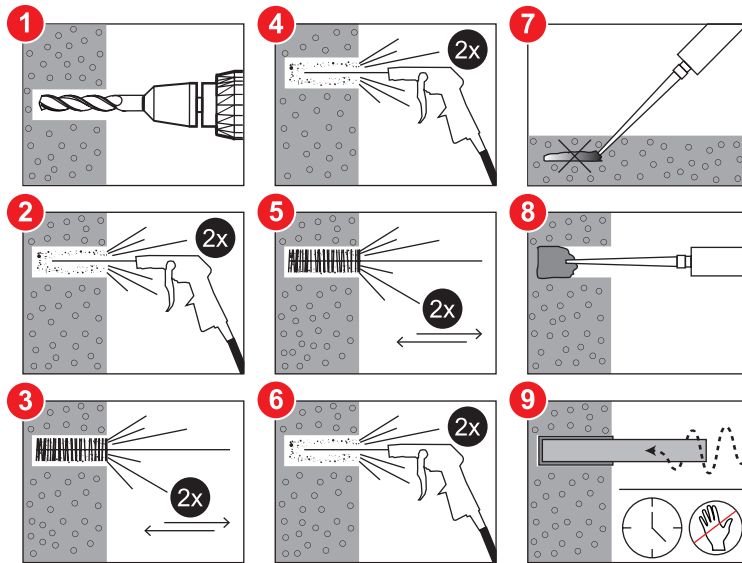

Product	Art. No.	Cartridge Volume	Application Gun	Qty Per Box
PRO-200 Plus Seismic 410+10ml	64411	420 ml	HKD 21	12



Product	Art. No.	Cartridge Type	Material
HKD 21	66002	380 ml, 420 ml Coaxial 10:1	Metal



Product	Art. No.	Cartridge Type
MIXER	66020	Pro-200 Plus Seismic



Product	Art. No.
HKP 1	66010

PRO-200 Plus Seismic

Application

PRO-200 Plus Seismic

Technical Information

HKD 21

Accessory

MIXER

Accessory

HKP 1

Accessory



Chemical Anchors

Heavy Duty Anchors

General Purpose Fasteners

Frame Anchors

Aerated Concrete Anchors

Drywall Anchors

Nailing Systems

Insulation Anchors

Screws

Drill Bits

Scaffold Fasteners

Solar System Fasteners

Special Fixing

